



Makrolon® AS2 sheet

ANSI glazing

Makrolon® AS2 sheet is a polycarbonate product with an ultra-hard coating designed for high optical quality and exceptional durability. State-of-the-art manufacturing and inspection processes provide low optical distortion and the advanced hard coat technology provides excellent abrasion resistance, chemical resistance, and long lasting outdoor weathering performance. Developed to maximize operator safety and visibility, the product conforms to the AS2 requirements of the ANSI Z26.1 standard. This lightweight and high impact resistance polycarbonate sheet product provides security combined with durability, resulting in less maintenance and downtime.

Makrolon AS2 is offered with a five (5) year Limited Product Warranty against breakage for flat vertical applications. The terms of the warranty are available upon request.

Applications

Bus driver safety surrounds, transportation glazing, ultra-abrasion resistant requirements

Typical Properties*

Property	Test Method	Units	Values
PHYSICAL			
Specific Gravity	ASTM D 792	–	1.2
Light Transmission, Clear @ 0.236"	ASTM D 1003	%	84
Chemical Resistance	ANSI Z26.1	–	Pass
Taber Abrasion @ 1000 Cycles, Delta Haze CS-10F Wheel @ 500 g load	ASTM D 1044	%	1.7
MECHANICAL			
Tensile Strength, Ultimate	ASTM D 638	psi	9,500
Modulus of Elasticity	ASTM D 638	psi	340,000
Flexural Strength	ASTM D 790	psi	13,500
Compressive Strength	ASTM D 695	psi	12,500
Izod Impact Strength, Notched @ 0.125"	ASTM D 256	ft-lbs/in	16
Izod Impact Strength, Unnotched @ 0.125"	ASTM D 256	ft-lbs/in	No Break
Instrumented Impact @ 0.125"	ASTM D 3763	ft-lbs	47
Poisson's Ratio	ASTM E 132	–	0.38
Rockwell Hardness	ASTM D 785	–	M70/R118
THERMAL			
Coefficient of Thermal Expansion	ASTM D 696	in/in/°F	3.75 x 10 ⁻⁵
Heat Deflection Temperature @ 264 psi	ASTM D 648	°F	270
Heat Deflection Temperature @ 66 psi	ASTM D 648	°F	280
ELECTRICAL			
Dielectric Constant @ 10 Hz	ASTM D 150	–	2.96
Dielectric Constant @ 60 Hz	ASTM D 150	–	3.17
Volume Resistivity	ASTM D 257	Ohm-cm	8.2 x 10 ¹⁶
Dissipation Factor @ 60 Hz	ASTM D 150	–	0.0009
Dissipation Factor @ 1 MHz	ASTM D 150	–	0.01
Arc Resistance	–	–	–
Stainless Steel Strip Electrodes	ASTM D 495	Seconds	10
Tungsten Electrodes	ASTM D 495	Seconds	120
Dielectric Strength, in air, 125 mils	ASTM D 149	V/mil	380
AGENCY CONFORMANCE			
FMVSS 205	ANSI Z26.1, AS2	–	Pass

*Typical properties are not intended for specification purposes.

Distributed by:




Toll Free: 1.800.277.7898
www.piedmontplastics.com




Makrolon® AS2 sheet

Impact Resistance*

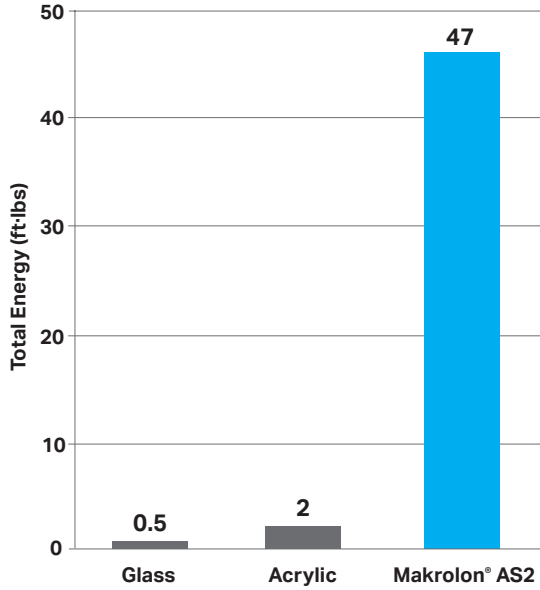

*Instrumented Impact per ASTM D 3763,
sample thickness is 0.125" nominal

Abrasion Resistance*

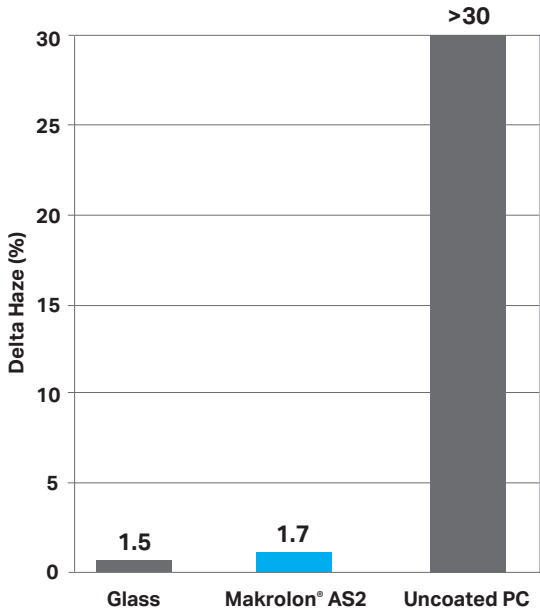

*Taber Abrasion per ASTM D 1044,
1000 cycles using CS-10F wheels at 500 g load

Distributed by:



Piedmont Plastics®

where solutions take shape

Toll Free: 1.800.277.7898

www.piedmontplastics.com



The manner in which you use and the purpose to which you put and utilize our products, technical assistance and information (whether verbal, written or by way of production evaluations), including any suggested formulations and recommendations, are beyond our control. Therefore, it is imperative that you test our products, technical assistance, information and recommendations to determine to your own satisfaction whether our products, technical assistance and information are suitable for your intended uses and applications. This application-specific analysis must at least include testing to determine suitability from a technical as well as health, safety, and environmental standpoint. Such testing has not necessarily been done by Covestro.

Unless we otherwise agree in writing, all products are sold strictly pursuant to the terms of our standard conditions of sale which are available upon request. All information and technical assistance is given without warranty or guarantee and is subject to change without notice. It is expressly understood and agreed that you assume and hereby expressly release us from all liability, in tort, contract or otherwise, incurred in connection with the use of our products, technical assistance, and information. Any statement or recommendation not contained herein is unauthorized and shall not bind us. Nothing herein shall be construed as a recommendation to use any product in conflict with any claim of any patent relative to any material or its use. No license is implied or in fact granted under the claims of any patent.

With respect to health, safety and environment precautions, the relevant Safety Data Sheets (SDS) and product labels must be observed prior to working with our products.