


Baluln25

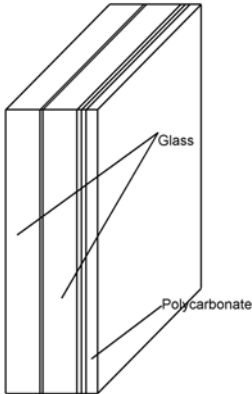

## PRODUCT DESCRIPTION

Bullet Resistant Security Glazing

Nominal Thickness .98" (25mm)  
Weight 11.3 lbs per SF

Available sizes – Any size up to maximum 60' x 96" Dimensional  
Tolerance: +/- .250

## PERFORMANCE

- UL Listed Level 3
- 3 shots 44 magnum, 4 1/2" triangle.

## GUIDE SPECIFICATION

Ballistic resistant glass where shown shall be BALULN25 glass-clad polycarbonate as manufactured by Global Security Glazing - Selma, AL. Each unit for glass type \_\_\_\_\_ shall be BALULN25. BALULN Products are designed for applications where ballistics performance is primary and optical characteristics are secondary. Protected side of window is a mar resistant polycarbonate with threat side a glass surface.

Each unit shall have a nominal overall thickness of .98".

## APPLICABLE STANDARDS

- ASTM C 1036-06
- ASTM C 1349-04
- UL752

## INSTALLATION

Follow recommended glazing installations as set forth in:

- Glass Association of North America Glazing Manual
- Glass Association of North America Sealant Manual

Opening Any size up to max. sheet size  
Rabbit Depth 1 1/4"  
Edge Engagement 1"  
Edge Clearance 1/4"  
Face Clearance 1/8" each face

## WARRANTY (Short Version)

Global Security Glazing warrants BALULN Series of glass clad polycarbonate against defects in material and workmanship resulting in edge separation or delamination for a period of five (5) year from date of manufacture. (See Warranty Sheet for complete warranty information and specifications).

## TECHNICAL SUPPORT

Contact factory for technical & specification support and glazing guideline information at 1-800-640-6541.