

Project	Type
Catalog #	

DESCRIPTION

Saver3 maximizes LED performance by delivering a bright, uniform light across sign faces, allowing sign builders to light their signs with less LEDs, reducing overall system costs. Saver3 is the perfect choice for those applications that need great light on a competitive budget.

FEATURES AND SPECIFICATIONS

- Patented Quick Connect tabs - easiest and fastest system to install on the market. No need for cutting or splicing wires
- Suitable for damp locations
- Class 2 compliant
- 5-year warranty

CERTIFICATIONS


- UL Recognized (US and Canada) and CSA approved
- UL Classified (US and Canada) for retrofits



2 MODULES / FOOT

OUTLINE DRAWING

Dimensions are in inches

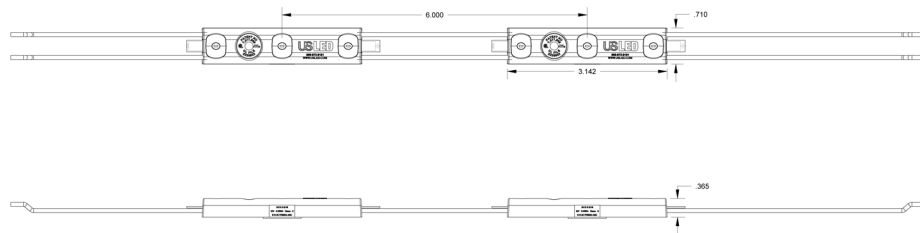

ORDERING INFORMATION

Example: SV3-3-12-W

SV3	3	12	W
Series	LEDs per Module	Input Voltage	Color
SV3	3	12	W White

POWER SUPPLY AND LOADING SPECS

	Min Ft	Max Ft	US LED Model Number
12W Load	4.5	9	PSA-12-12 (LED120A0012V10F)
60W Load	8	45	PSA-12-60 (LED120A0012V50F) PSA-12-60V (LEDINTA0012V50FO)

PACKAGING SPECS

	Modules (feet)
Master Case	666 (333')
Inner Case	222 (111')
Tray	74 (37')

ENERGY DATA

Input Voltage (V DC)	12
Module Level Power (W/ft)	1.32
System Level Power (W/ft)*	1.50
Delivered Lumens (Lm/ft)**	100
System Efficacy (Lm/W)	66
Viewing Angle (°)	120
Correlated Color Temp (K)	6300
LED L70 Lifetime (hrs)†	99,000
Typical Stroke (in)***	6
Operating Temperature	(-40) to 60 °C / (-40) to 140 °F

* System power consumption, which includes power supply losses.

** Estimated light output under application operating conditions.

*** For 5 inch deep can.

† US LED product 'Lifetimes' refer only to the LED light engine, not the power source, and are based on the Illuminating Engineering Society's TM21 Calculated Lumen Maintenance methodology at a 25°C/77°F ambient temperature. The lifetimes are solely meant to be a guide for expected LED degradation and not a warranty or predictive of their actual life, which can be affected by ambient temperatures and other factors

Distributed by:



Toll Free: 1.800.277.7898

www.piedmontplastics.com